

Perfect for enhancing your windows, LikaGlass is a LED block specially designed for installation on glass or transparent PMMA surfaces.



OUR COMMITMENTS



Glass mounting without drilling



Opaque film on the back of the glass



Concealed mounting : 3M® double-sided tape



21-days lead time from validation of technical drawings to delivery



Up to 5 year guarantee



SPECIFICATIONS

PRODUCT SPECIFICATION

Material: PMMA (Acrylic)

Paint: RAL® or Pantone®

Vinyl: 3M® 3630 and Avery Dennison® 4500TF

Mounting: Threaded rods / Spacer / Snap System / Easy-fix

Voltage: 12 V

Production: CE-certified components

Protection rating: IP 68

Sign resistance: -10 to 50 degrees

Fire class certification: PMMA certificate (M4)

LED SPECIFICATION

Brightness: Up to 2100 cd/m²

LED source LUM flux: 50 Lumen

Efficiency of finished product: 80 Lumen/watt

Power consumption per LED (white): 0.07 Watt

Life span: 80% to 10,000 hours

LED color specified: Yes

Dimmable: Yes

Installation of replacement letters: Yes

DIFFERENT LIGHTING EFFECTS




Front light

Front side light

Front and front side light


TECHNICAL DRAWING

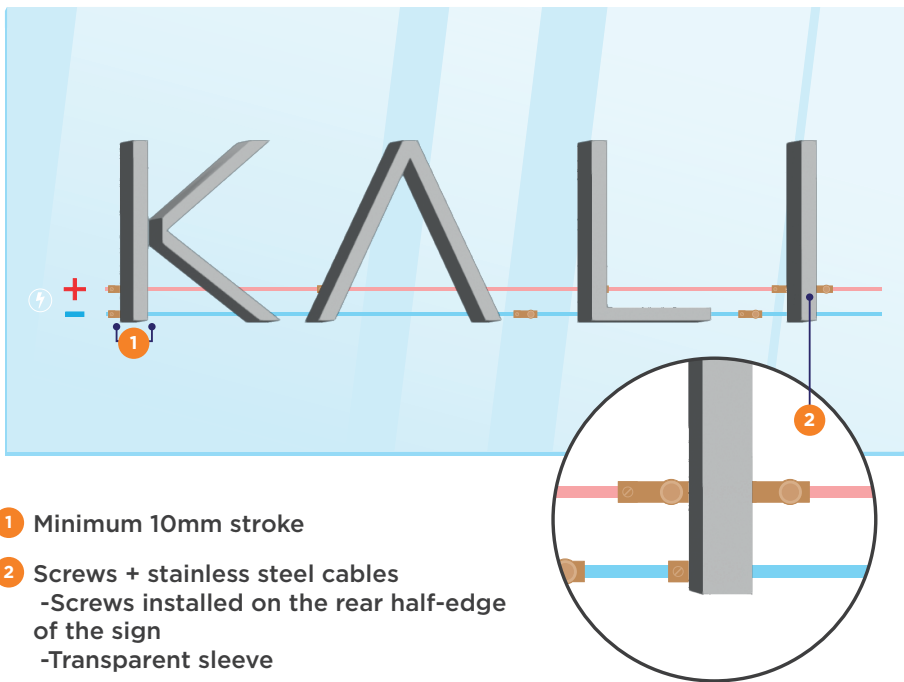

- 1 Minimum 10mm stroke
- 2 Screws + stainless steel cables
 - Screws installed on the rear half-edge of the sign
 - Transparent sleeve

OPTION

CONCEALED MOUNTING

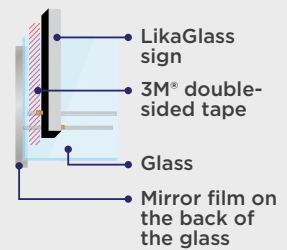

THE KALISIGN SPIRIT

Tailor-made personalized solutions with a wide choice of:

- + PT® and Respect® acrylics
- + RAL® and Pantone® paint
- + Vinyls from the 3M® 3630 and Avery Dennison® 4500TF



Please note: vinyl only fits on the front and back of the sign.

SPECIFIC REQUEST

Thanks to our excellent savoir-faire, we can offer you a wide range of customisation options. Contact our team to find out more!