

Similar to LikaSlim, LikaNeon gives a visual neon look while offering the advantages of LEDs.



OUR COMMITMENTS



+30 available colors



21-days lead time from validation of technical drawings to delivery



IP68



Up to 5 year guarantee



SPECIFICATIONS

PRODUCT SPECIFICATION

Material: PMMA (Acrylic)

Paint: RAL® or Pantone®

Mounting: Threaded rods / Spacers / Snap System / Easy-fix

Voltage: 12 V

Production: CE-certified components

Protection rating: IP 68

Sign resistance: -10 to 50 degrees

Fire class certification: PMMA certificate (M4)

LED SPECIFICATION

Brightness: Up to 2100 cd/m²

LED source LUM flux: 50 Lumen

Efficiency of finished product: 80 Lumen/watt

Power consumption per LED (white): 0.07 Watt

Life span: 80% to 10,000 hours

LED color specified: Yes

Dimmable: Yes


Installation of replacement letters: Yes

DIFFERENT LIGHTING EFFECTS




Front and front side light

TECHNICAL DRAWING

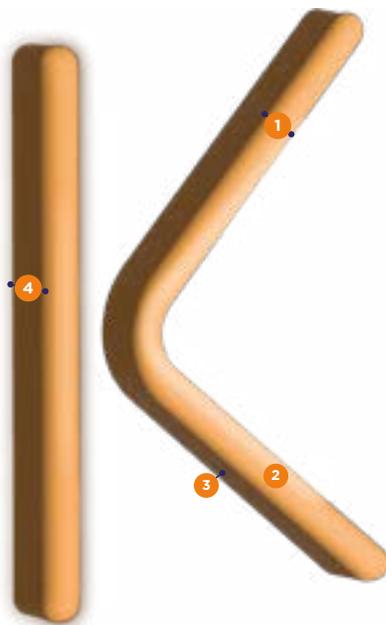

- 1 From 10 to 18mm letter stroke thickness
- 2 PMMA face
- 3 Illuminated front side and painted back side
- 4 From 30 to 33mm letter thickness

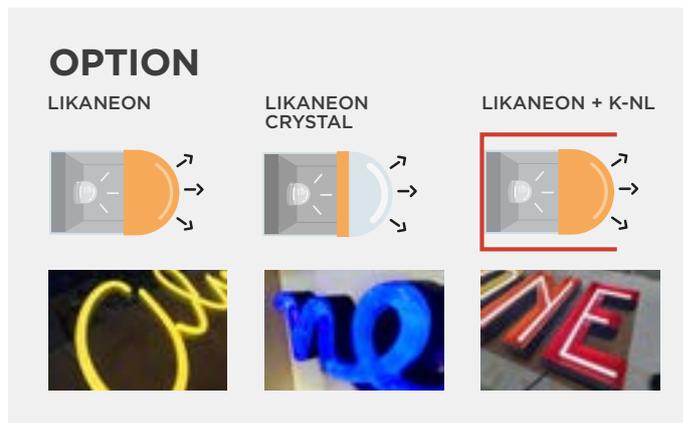

AVAILABLE COLORS

- | | | |
|-------|-------|--------|
| PT215 | PT100 | PT617 |
| PT235 | PT110 | PT945 |
| PT478 | PT775 | PT946 |
| PT266 | PT327 | 14000K |
| PT128 | PT324 | 6500K |
| PT137 | PT835 | 3000K |

THE KALISIGN SPIRIT

Tailor-made personalized solutions with a wide choice of:

- + PT® and Respect® acrylics
- + RAL® and Pantone® paint

Possibility of mounting on an acrylic backer with the cables hollowed out inside.

SPECIFIC REQUEST

Thanks to our excellent savoir-faire, we can offer you a wide range of customisation options. Contact our team to find out more!